
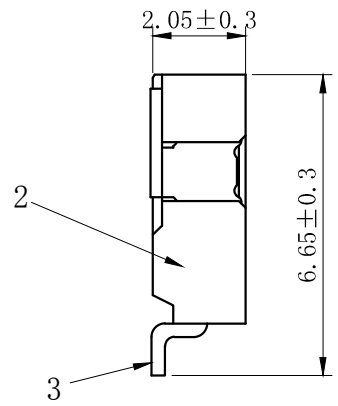




序号	名称	材料
1	插针	磷青铜 (镀亚光)
2	底座	LCP UL94V-0
3	焊片	磷青铜 (镀亚光)

版次	日期	内容

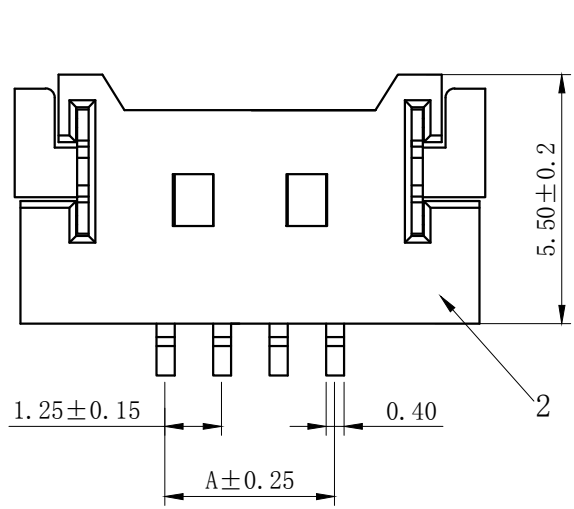

Electrical properties

- 1、Current rating: 1A AC\DC
- 2、Voltage rating: 125V AC\DC
- 3、Temperature range: -25°C to 85°C
- 4、Contact resistance: Initial value/20mΩ max
- 5、Insulation resistance: 100MΩ min
- 6、Withstanding voltage: 500V AC/ minute

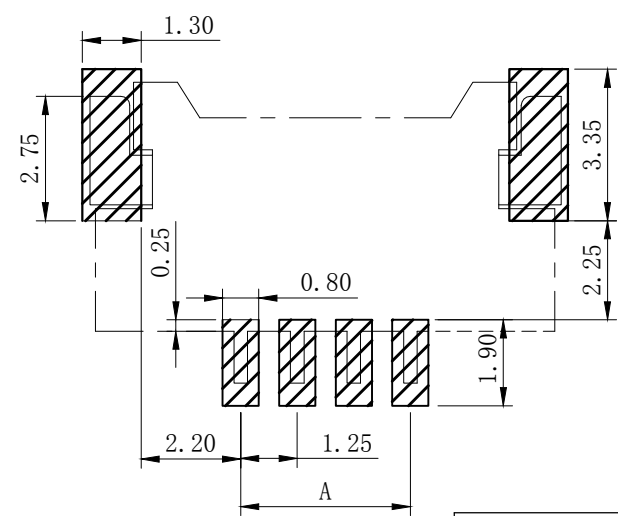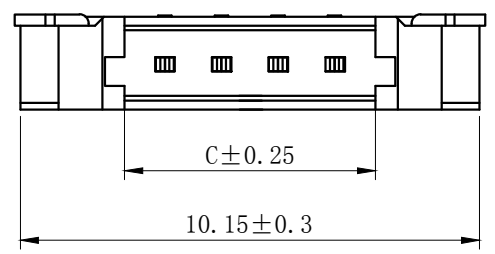

孔位 poles	A	B	C
2	1.25	7.65	3.05
3	2.50	8.90	4.30
4	3.75	10.15	5.55
5	5.00	11.40	6.80
6	6.25	12.65	8.05
7	7.50	13.90	9.30
8	8.75	15.15	10.55
9	10.00	16.40	11.80
10	11.25	17.65	13.05
11	12.50	18.90	14.30
12	13.75	20.15	15.55
13	15.00	21.40	16.80
~	~	~	~
20	23.75	30.15	25.55

PCB LAYOUT

浙江乐马电气有限公司		设计	张书晨	
尺寸公差	角度公差	品名: 53780-nAB	审核	王佳
.X ±0.25	X.° ±3.0°			
.XX ±0.15	.X° ±2.0°			
.XXX ±0.05	.XX° ±1.0°	图号: 12504-AB	批准	陈其林
单位: mm		比例: --		